

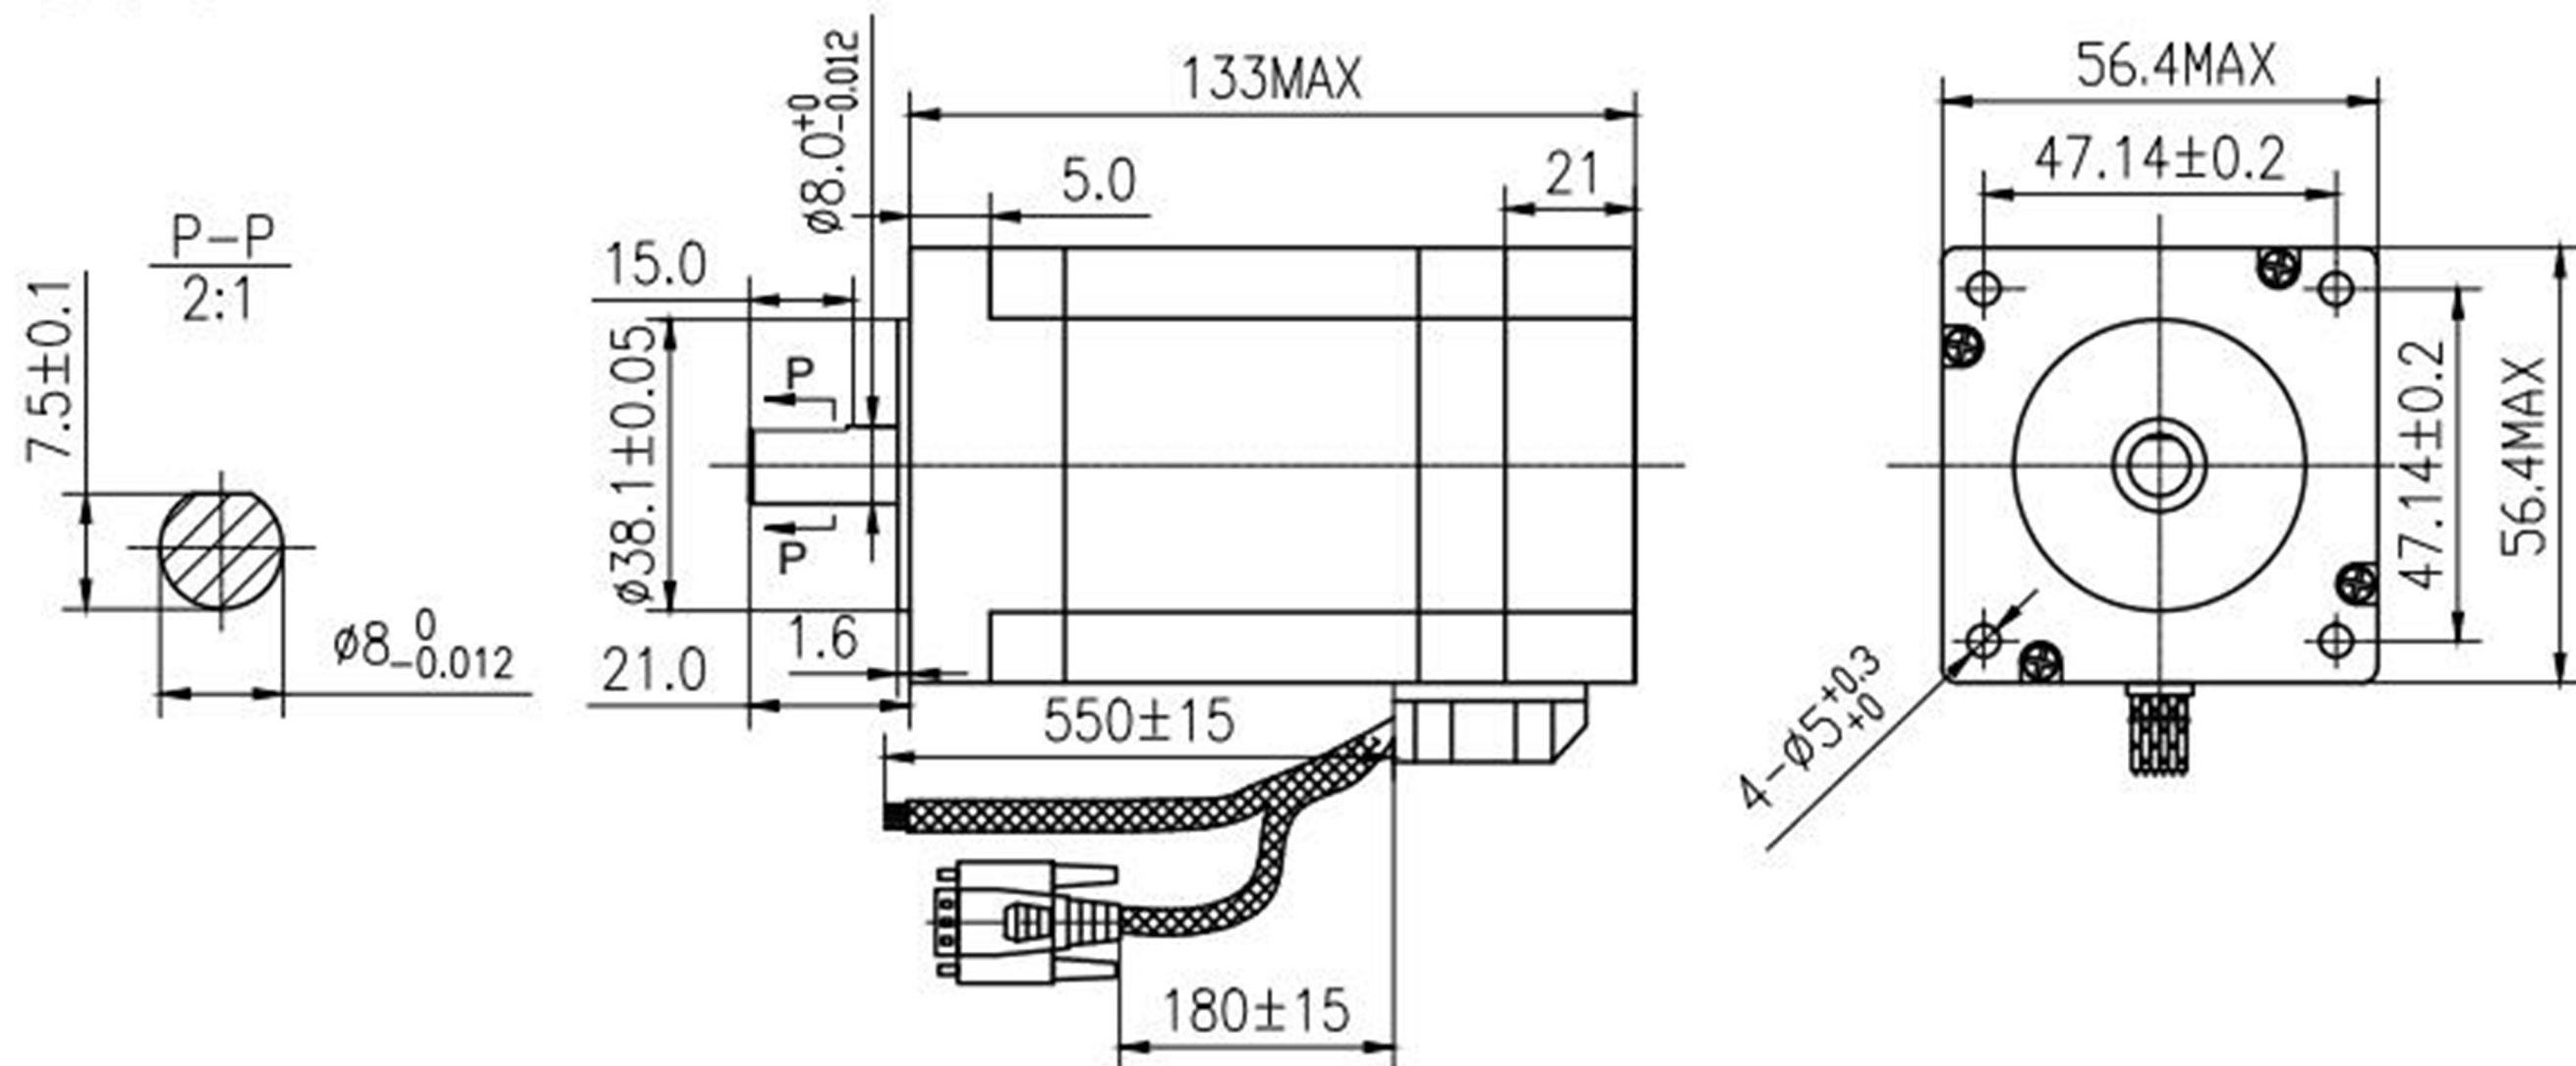


DIMENSIONS



SPECIFICATIONS unit=mm

PHASE	2PHASE	COMMENT
STEP ANGLE	$1.8 \pm 5\%$ °/STEP	
VOLTAGE	3.6V	
CURRENT	4.0A/PHASE	
RESISTANCE	$0.9 \pm 10\%$ Ω/PHASE	
INDUCTANCE	$3.8 \pm 20\%$ mH/PHASE	
HOLDING TORQUE	2.8N.mMin	
DETENT TORQUE	12.0N.cmMax	
INSULATION CLASS	B	
LEAD STYLE	AWG18UL 1332	
ROTOR TORQUE	800g.cm^2	
RESOLUTION	1000	

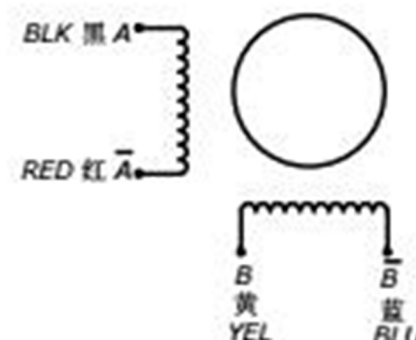

1	A-	黑 BLK
2	B-	黄 YEL
3	GND	白 WHT
11	A+	蓝 BLU
12	B+	绿 GRN
13	VCC	红 RED

2017.9.23B

					57HBM28-1000			
						等级标记	重 量	比 例
		Allen	2017.9.23					
		ANDY	2017.9.23					
						1	共	张